

INSTRUCTION SHEET CSC58KD



2245 Delany Road
Waukegan, IL 60087
Ph: 847/244-1800 • 800/323-4656
Fax: 847/244-1818 • 800/327-1698



CSC58

TOOLS REQUIRED:
1 - Slotted screwdriver
1 - Phillips screwdriver

Parts

- 2 - side panels
- 1 - back panel
- 1 - base frame
- 1 - front frame
- 2 - shelves
- 1 - bottom panel
- 1 - drop down door
- 2 - swinging doors
- 1 - keyboard/mouse shelf assembly
- 1 - bottom cross bar
- 1 - middle cross bar
- 1 - top

PARTS LIST

- 4 - shelf brackets (for adjustable shelf)
- 4 - casters two with brake
- 1 - electric assembly
two screws
one bracket
two wing nuts
one three outlet electric w/15' cord


1
Interlock back and side panels.



2
Install large frame into front edges of side panels. Insert bottom frame bar into place.




3
Install casters on bottom of base frame. Make sure both locking casters are on the same side (usually the front of the unit).

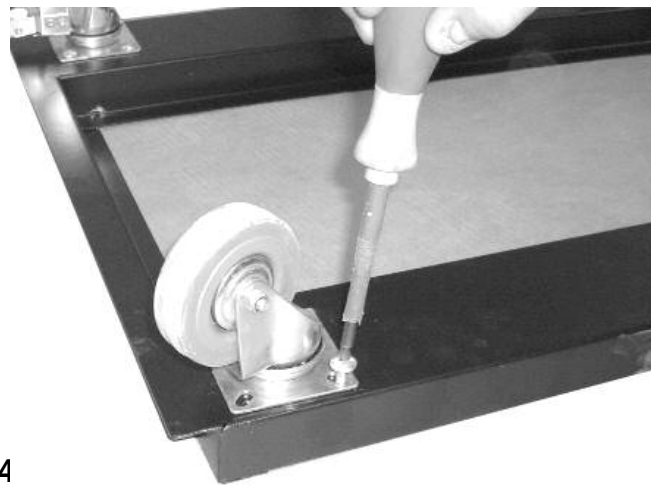


4
Turn base frame with casters over and with the help of an assistant lift unit onto base frame.



5
Install middle cross bar.

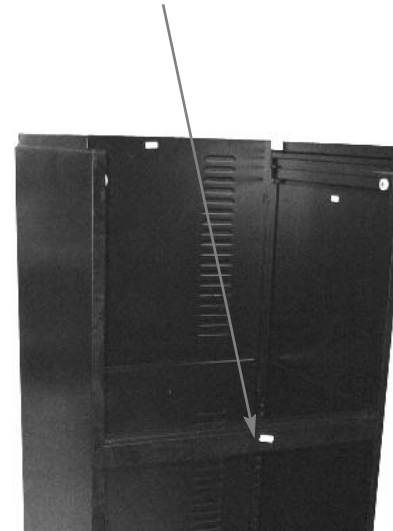


6
Slide bottom shelf into place.

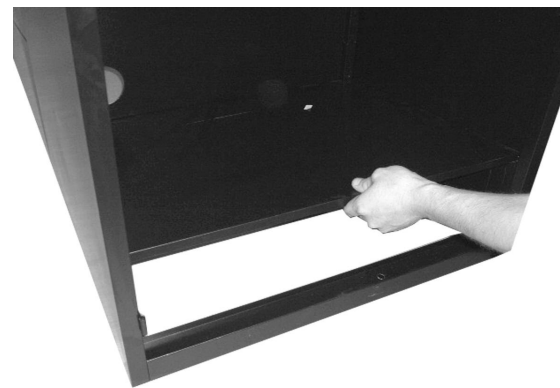


7
Turn middle shelf upside down and install keyboard shelf mounts facing in toward middle of shelf.



8
Install keyboard mounts on keyboard shelf facing up and to the inside.

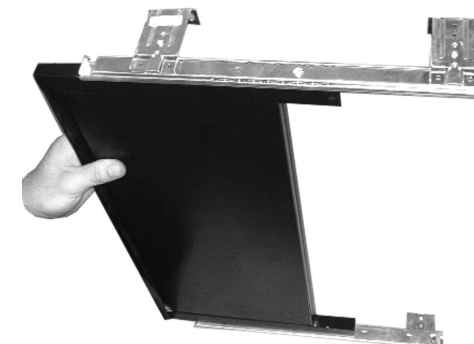

9
Turn middle shelf and keyboard shelf upside down and mount keyboard shelf to bottom of middle shelf using the mounts installed in steps 6 & 7.

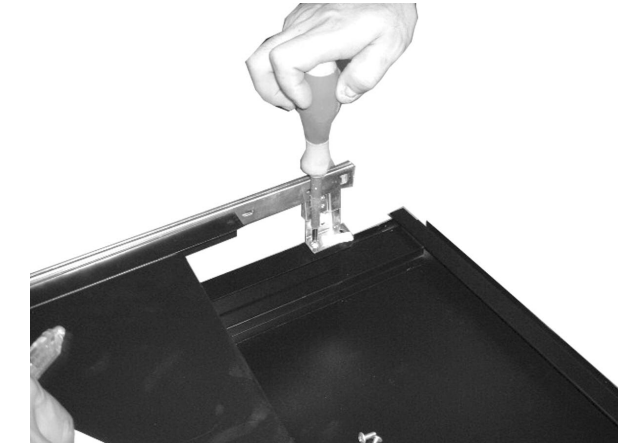

10
Tilt middle shelf with keyboard shelf to the side and insert into unit. Straighten shelf out and lower it into place.



11

Slide upper door panel onto track on top of unit and shut door.



13

Lower doors onto hinge pins.



15

Install electric assembly using instructions that are included with the electric assembly unit. Electric mounts above cable pass through hole on the back of the CSC58KD. Typically mounts on inside of unit but it can be mounted on outside if desired.


17

Put top on. Push down firmly on all four corners to secure.



12

Insert hinge pins into mounts on front of unit.

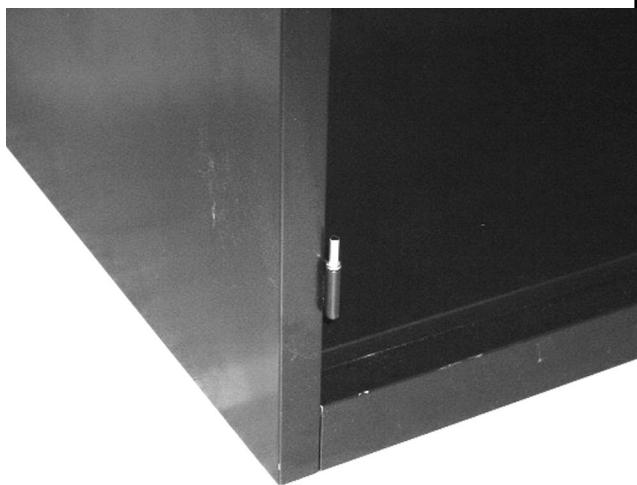

14

Install shelf mounts on inside of unit in all 4 corners. Make sure to install at same desired height.



16

Place remaining shelf on shelf mounts.

