



RealTree® Outfitter's Series Viper Ultra

Please read carefully BEFORE using your new Summit Climbing Treestand.

Congratulations! You have purchased the finest commercially available treestand on the market today. Summit Climbing Treestands are designed and built to provide years of trouble-free, successful hunting with a minimum of maintenance and care. They are certified to meet the requirements of the Treestand Manufacturers Association (TMA) Standards. This booklet is provided to you to outline the recommended use, care and maintenance of your Summit Climbing Treestand.

WARNING

You must fully read, understand and follow these warnings and instructions (written and video)! Failure to follow these instructions may cause serious injury or death!!

You **MUST** also view the enclosed DVD
BEFORE using your new treestand!!

**WEIGHT LIMIT 300 LBS. TOTAL
DO NOT EXCEED THIS LIMIT!**

Stand minimum and maximum
tree size: 8-20" diameter

- **WHEN HUNTING FROM A TREESTAND FALLS CAN OCCUR ANY TIME AFTER LEAVING THE GROUND CAUSING INJURY OR DEATH! FOR THOSE REASONS ALWAYS WEAR A FALL ARREST SYSTEM (FAS) COMPRISING A FULL BODY HARNESS AT ALL TIMES AFTER LEAVING THE GROUND. YOU MUST STAY CONNECTED AT ALL TIMES AFTER LEAVING THE GROUND WHILE USING CLIMBING AND HANG-ON TREESTANDS. SINGLE SAFETY BELTS AND CHEST HARNESSES ARE NO LONGER PREFERRED AND SHOULD NEVER BE USED. IF YOU ARE NOT WEARING A FULL BODY HARNESS THAT IS PROTECTING YOU FROM A FALL, DO NOT LEAVE THE GROUND!**
- **READ AND UNDERSTAND ALL OF THE MANUFACTURER'S WARNINGS AND INSTRUCTIONS AND USE ALL SAFETY DEVICES PROVIDED. CONTACT SUMMIT TREESTANDS FOR ANY QUESTIONS. FAILURE TO DO SO COULD RESULT IN INJURY OR DEATH!**
- **A SIGNAL DEVICE SUCH A MOBILE PHONE, RADIO, WHISTLE, SIGNAL FLARE OR PERSONAL LOCATOR DEVICE (PLD) MUST BE ON YOUR PERSON AND READILY AVAILABLE AT ALL TIMES! INFORM SOMEONE OF YOUR HUNTING LOCATION, WHERE THE TREESTAND WILL BE LOCATED AND THE EXPECTED DURATION OF THE HUNT!**
- **DO NOT USE ANY TREESTAND UNLESS YOU ARE IN GOOD PHYSICAL SHAPE AND HAVE NO PHYSICAL LIMITATIONS OR MEDICAL CONDITIONS WHICH MAY PREVENT YOU FROM SAFELY USING THIS PRODUCT. ALWAYS CONSULT A PHYSICIAN IF YOU HAVE ANY QUESTIONS ABOUT YOUR PHYSICAL ABILITY TO USE THIS PRODUCT.**
- **NEVER USE A TREESTAND WHILE TAKING DRUGS, ALCOHOL OR CERTAIN PRESCRIPTION DRUGS! ALWAYS CONSULT A PHYSICIAN IF YOU HAVE ANY QUESTION ABOUT TAKING SPECIFIC MEDICATIONS AND USING THIS PRODUCT!**
- **NEVER USE A TREESTAND DURING INCLEMENT WEATHER SUCH AS RAIN, LIGHTNING, WINDSTORMS OR ICY CONDITIONS!**
- **NEVER USE A TREESTAND WHEN FEELING ILL, NAUSEOUS, DROWSY OR DIZZY!**
- **BE WELL RESTED AND NEVER HURRY. HURRYING CAUSES ACCIDENTS!**
- **NEVER USE A TREESTAND ON A DEAD, LEANING, DISEASED, LOOSE BARKED TREE, ON A UTILITY POLE OR ON TREES THAT HAVE ANY OBSTRUCTIONS THAT MAY LIMIT TREESTAND USE! NEVER RELY ON A TREE BRANCH FOR SUPPORT!**
- **NEVER JUMP OR BOUNCE ON A TREESTAND TO SECURE IT TO THE TREE!**
- **PULL UP A BOW, BACKPACK, FIREARM OR OTHER EQUIPMENT ONLY AFTER SECURING YOUR SAFETY HARNESS TO THE TREE. FIREARMS MUST BE PULLED UP UNLOADED, CHAMBER OPEN AND MUZZLE DOWN!**
- **UNDER NO CIRCUMSTANCE SHOULD YOU EVER RELEASE THE CABLE FROM THE PLATFORM OR SEAT CLIMBER TO MAKE ADJUSTMENTS ONCE YOU ARE OFF THE GROUND!!!**
- **NEVER MODIFY YOUR STAND IN ANY WAY BY MAKING REPAIRS, REPLACING PARTS, OR ALTERING ADDING OR ATTACHING ANYTHING TO IT EXCEPT IF EXPLICITLY AUTHORIZED BY THE MANUFACTURER!**
- **PRACTICE INSTALLING, ADJUSTING AND USING YOUR TREESTAND AT GROUND LEVEL PRIOR TO USING IT AT ELEVATED POSITIONS!**
- **INSTRUCTIONS (WRITTEN AND VIDEO) SHOULD BE KEPT IN A SAFE PLACE AND REVIEWED AT LEAST ANNUALLY. IT IS THE RESPONSIBILITY OF THE TREESTAND OWNER TO FURNISH THE INSTRUCTIONS TO ANY PERSON THAT WHO BORROWS OR PURCHASES THE TREESTAND! THIS SUMMIT TREESTAND IS DESIGNED TO BE USED AS A COMPLETE SYSTEM - NEVER LOAN OR SELL ONLY A PORTION OF THE CLIMBING TREESTAND SYSTEM.**
- **BEFORE EACH USE OF YOUR SUMMIT TREESTAND, ALWAYS INSPECT THE TREESTAND AND HARNESS FOR ANY DAMAGE, CRACKS, TEARS, CABLE WEAR OR ABRASION THAT MAY HAVE OCCURRED IN TRANSPORTING / STORING YOUR TREESTAND. DO NOT USE IF ANY DAMAGE IS FOUND! CONTACT CUSTOMER SERVICE FOR THE APPROPRIATE REPAIR / REPLACEMENT PROCEDURE!**
- **DO NOT LEAVE YOUR TREESTAND OUTDOORS WHEN IT IS NOT BEING USED! ANY STAND TUBING THAT IS ALLOWED TO FILL WITH RAINWATER AND FREEZE WILL RUPTURE OR BURST - DO NOT USE YOUR TREESTAND IF THIS OCCURS!**

Section 1. Assembling Your New Treestand.

Please contact us at www.summitstands.com or 256-353-0634 to obtain any missing parts or if your DVD does not work.

Comfort Pad. The camouflaged foam pads for the frame can be easily attached for additional comfort and noise reduction. The cable ties for attaching the pads are “in-line” cable ties: Note the *Correct and Incorrect* ways of attaching. To attach - pull the cable ties snug, cut off the excess, and rotate the clasp to the underside of the pad. Place the 36” pad on the front of the stand and place the two 12” pads on the arm rests. See *Figure 1* for pad placement (your pad configuration may vary). Use the remaining cable ties to secure the pads.

Backpack Straps. The backpack straps consist of three parts - two 1” wide straps each with sewn in loop and one 2” wide strap with buckles and a snap clip.

Step 1. Secure the snap clip around the seat climber perimeter bar as shown in *Figure 2*.

Step 2. Place the looped end of the 1” wide strap around the seat climber stand tubing at point (A) and bring the loose end back through the loop as shown in *Figure 3*. Repeat for other side.

Step 3. Thread the loose end of each 1” strap through the buckle on the 2” strap as shown in *Figure 4*.

Footrest (Installation is made easier by the use of a powered screwdriver)

Step 1. Insert the Footrest Bracket into the perimeter tube as shown in *Figure 5*. This bracket should be placed between the first and second rung from the front of the platform.

Step 2. Secure the bracket with one self tapping screw as shown in *Figure 6*. Repeat for the other side.

Step 3. Insert two of the long shank bushings into the pre-punched holes in each end of the footrest tube.

Step 4. Insert the short shank bushing into the outside of each footrest bracket from **Step 1** (See *Figure 7*).

Step 5. Line up the footrest bar on the **INSIDE** of the two footrest brackets and secure one side using the 1 1/2” bolt and lock nut. The gap between the other side of the bar and the bracket is normal at this point.

Step 6. Insert the remaining 1 1/2” bolt through the other side of the footrest bar and pull the bar to the side so that you can tighten the lock nut. If squeaking occurs, loosen the bolts by 1/2 turn.

Step 7. Fold the bar down and note where it crosses the stand frame - make a mark on the footrest at this point. Fold the bar back up. Secure the two rubber bumpers at the mark using the two remaining self tapping screws as shown in *Figure 8*. Your finished footrest should look like *Figure 9*.

Seat Attachment.

The foam seat is removable on this stand. **DO NOT** leave your stand outdoors when you are not using it.

Step 1. Position the seat inside the seat climber frame.

Step 2. Wrap the strap webbing over the frame from the inside out as shown in *Figure 10*.

Step 3. Turn the three bar slide buckle slightly sideways and push it through the metal D buckle sewn onto the end of the strap (See *Figure 11*).

Index:

General Warnings and Precautions

Section 1

Section 2

Section 3

Section 4

Section 5

Section 6

Assembling Your Treestand

Using Your New Treestand

Maintenance and Care of your Stand

Limited Warranty

Parts List

Harness Suspension

Page 1

Page 2 - 3






Page 3 - 7

Page 7 - 8

Page 7

Page 8

Page 8

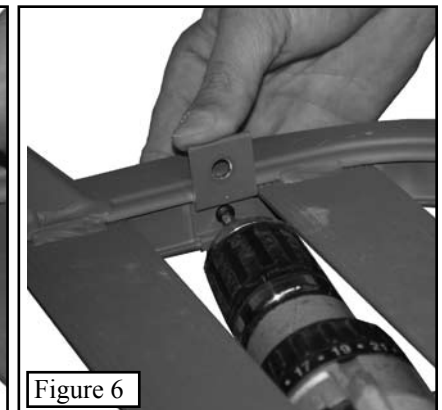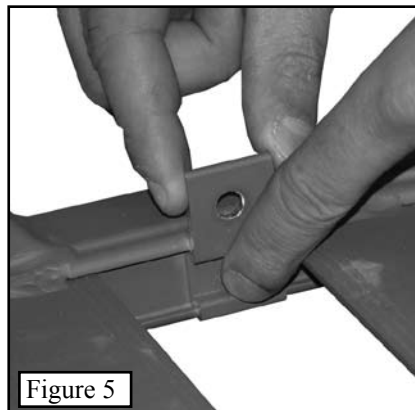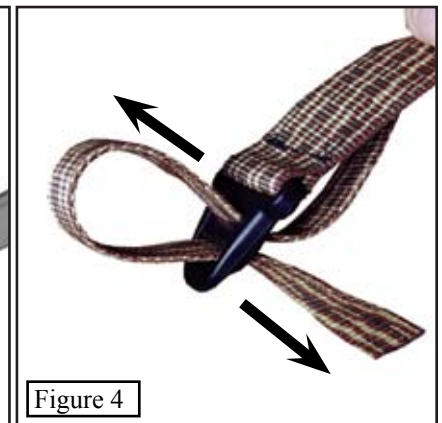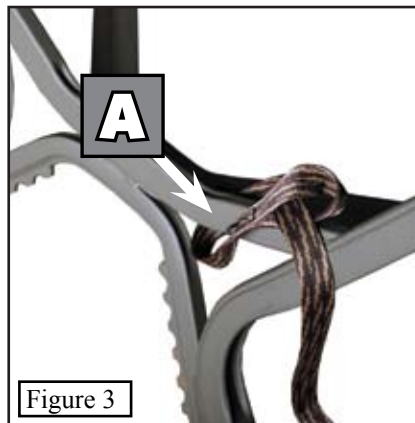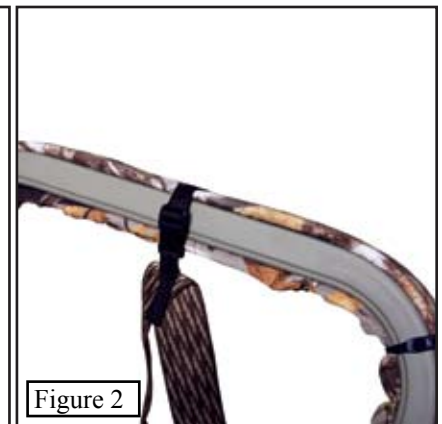

RapidClimb Stirrups. The two (2) RapidClimb stirrups fit on the curved upright arms of the platform. Simply slide one stirrup on each side of the platform so that they are on the inside of the platform and facing down as shown in *Figure 12*. Once positioned, secure with the bolt and wing nut provided as show in *Figure 13*. Occasional readjustment may be required as your footwear needs change. Wrap the supplied bungee cord around one side of the curved platform upright bars and push the S-hook through the loop as shown in *Figure 14*. Hook the S-hook around the opposite curved platform upright bar and back onto itself as shown in *Figure 15*.

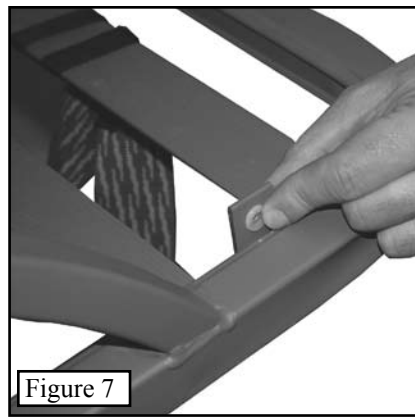


Figure 7

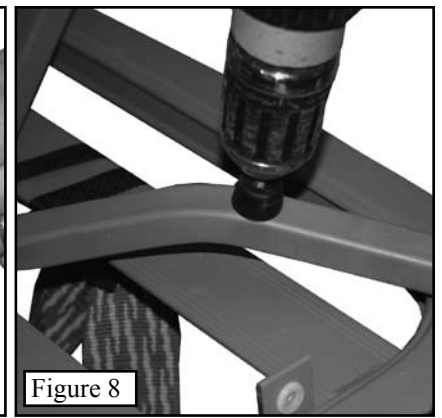


Figure 8

Section 2. Using Your New Treestand.

Part 1. Attachment To The Tree.

WARNING

Read and understand the harness usage instructions before attempting to climb! Be sure to maintain full body safety harness attachment to the tree at all times after leaving the ground.

Step 1. Attach the base platform to the tree first. To do this, pull down and hold the QuickDraw cable spring as shown in *Figure 16*. This will release the locking tab from the cable, allowing you to remove it from the cable bracket.

Step 2. Push the cable into the stand tubing until the cable stop can be lifted up out of the bracket. The cable should be loose at this point.

Step 3. Take one end of the cable around the tree and begin to slide it down into the tubing as shown in *Figure 17*. Once the cable slides easily into the tubing (it helps to bend the cable upward while pushing down on it as it is inserted), you are ready to place it in its final position.

Step 4. Pull the cable towards the back of the tree and “seat” the cable stop against the back of the bracket, as shown in *Figure 18*. The QuickDraw cable spring will “lock” into place behind one of the cable stops.

Step 5. Your cable bracket should now look like *Figure 19*.

WARNING

If the QuickDraw cable spring does not lock into place behind the cable stop, DO NOT USE THE TREESTAND since the cable can release resulting in a user to fall! Contact summit to obtain the proper corrective action.

Step 6. If necessary, go to the other side of the tree and position the other end of the cable by repeating the steps of pulling the QuickDraw cable spring, sliding the cable into the tubing, and assuring that the QuickDraw cable spring has locked into position.

NOTICE

The sole purpose of the plastic coating on the cable is to eliminate noise. After some use you may notice some abrasions, peeling or possibly cuts in the coating. This coating does not affect the performance or safety of your treestand. It is there to eliminate unnecessary noise when sliding the cable down into the tubing.



Figure 9



Figure 10



Figure 11

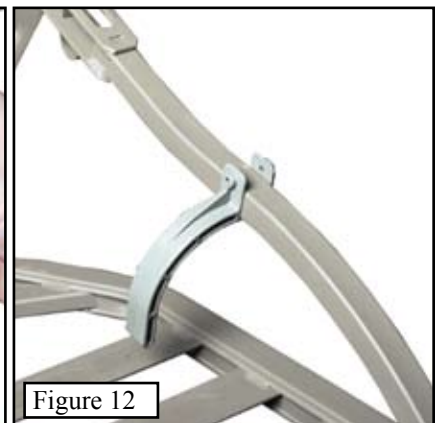


Figure 12

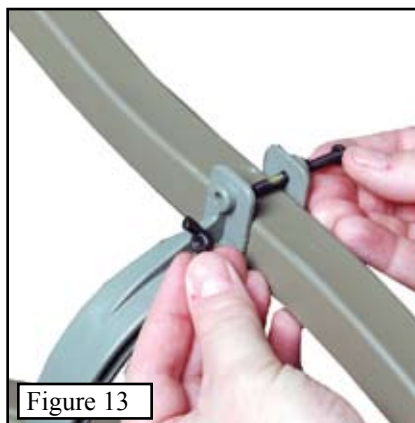


Figure 13



Figure 14

⚠ WARNING

DO NOT USE THE CABLE IF IT HAS BROKEN OR DAMAGED METAL STRANDS! Call immediately to order a replacement if this should occur.

To ensure that your treestand is level at the height at which you will be hunting, observe the relative change in the tree diameter between the base of the tree and the final treestand height. It is very important to adjust the treestand base platform and seat at the base of the tree such that the treestand base platform will be level at the height you hunt. Trees commonly found in swamp or marsh areas have a tendency to swell at their base, and these may require a greater starting angle in order for your treestand to be level - as compared to a normally tapered tree.

NOTICE

Based on usual taper - in order to ensure the platform and seat climber are level at hunting height, the front edge of the treestand (the edge away from the tree) should be 4-6 inches higher than the edge against the tree (See Figure 20). The treestand seat climber attaches above the standing platform and should also have the same basic angle as the platform before you start to climb.

Step 7. Repeat Steps 1-6 for the Seat Climber portion of the Treestand.

Step 8. Un-clip the backpack strap snap clip that is wrapped around the perimeter bar on the seat climber.

Step 9. Re-Snap the clip around the yolk of the platform assembly as shown in *Figure 21*. This is your seat climber / platform tether rope.

⚠ WARNING

The seat climber and platform MUST BE attached to each other with the backpack strap / tether strap, as shown in *Figure 21*.

Part 2. Climbing With Your New Stand.

Step 1. Now that your platform and seat section are attached to the tree, you are ready to climb. It is **MANDATORY** that you use a safety harness as you climb. **Be sure to read the safety harness instructions for proper use of your safety harness.** Following the Harness Instructions, attach the harness tether to the safety strap. Loop the strap around the tree to secure it. *See Figure 22.*

Step 2. Your RapidClimb stirrups and bungee heel cords should be already attached to your treestand. To climb, back your heel into the bungee heel cord (*Figure 23*) then simply slide your boot under the RapidClimb stirrup. Make sure that your boot is secure under the stirrup as shown in *Figure 24.*

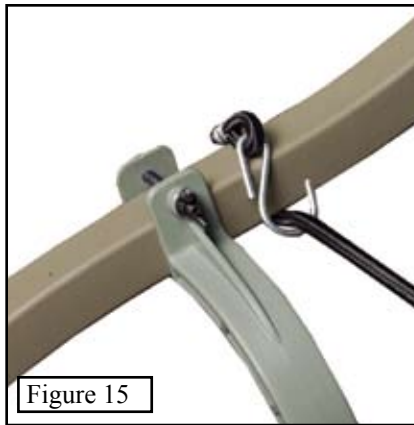


Figure 15



Figure 16

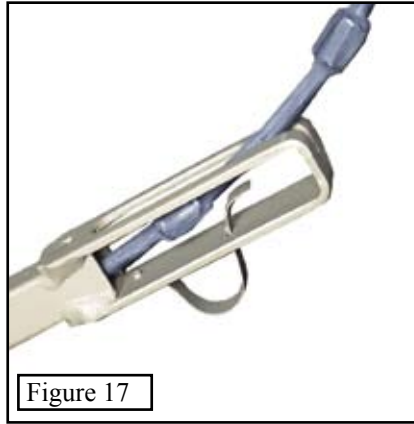


Figure 17

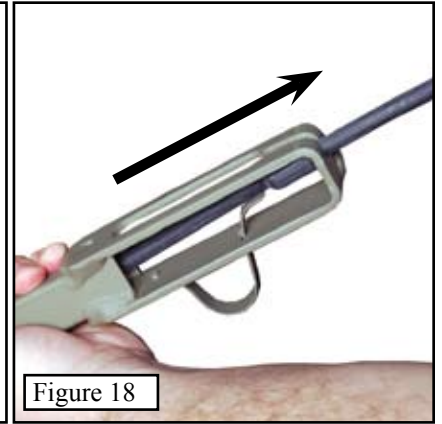


Figure 18


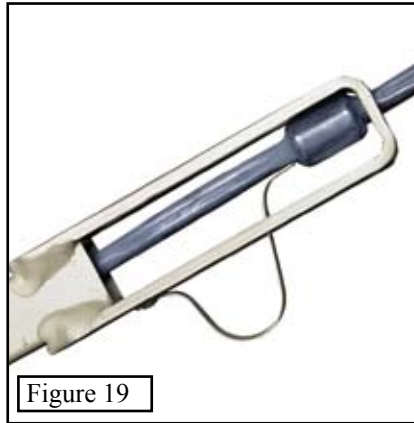


Figure 19

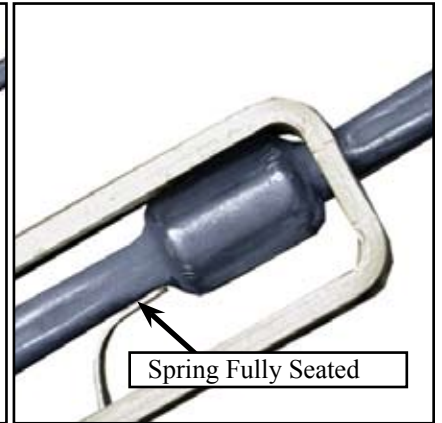

Spring Fully Seated



Figure 20

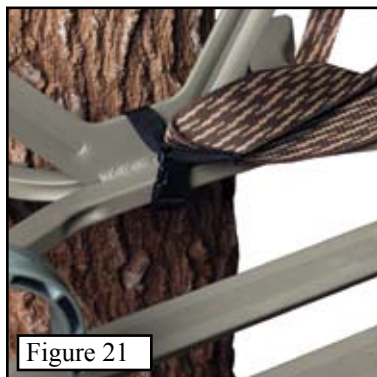


Figure 21



Figure 22



Figure 23

⚠ WARNING

At this point IT IS REQUIRED THAT YOU attach your safety harness to the safety strap around the tree and remain connected at all times after leaving the ground.

Hook the seat back elastic bungee cord as shown in *Figure 25* to keep it secure while you climb.

Step 3. To begin climbing, raise your seat climber up to just below waist height and grasp the upright arms very firmly as shown in *Figure 26*.

Step 4. With all of your weight back on the padded bar disengage the platform by lifting the treestand platform, as shown in *Figure 27*.

Step 5. Bring the platform up by raising your legs straight up.

Step 6. To re-engage the platform, simply rotate the edge back against the tree upwards, as shown in *Figure 28*.



Figure 24



Figure 25



Figure 26

⚠ WARNING

DO NOT JUMP OR BOUNCE ON THE PLATFORM OR SEAT to attempt to cause it to “dig” into the tree. It is not necessary and may cause you to inadvertently disengage the platform or seat.

Step 7. Now ease your weight back onto the platform (to ensure that you have not placed it on an unseen knot or limb on the backside of the tree). Once the platform is secure, slide your safety harness tether up the tree. **Repeat steps 3-7** until you are at your desired hunting height.

⚠ WARNING

DO NOT TIP YOUR WEIGHT ONTO YOUR TOES unless you are ready to move the platform. This will tend to disengage the platform from the tree.

The RapidClimb stirrups are located in such a position that equal distribution of weight will secure the platform to the tree while climbing.

⚠ CAUTION

DO NOT USE the Viper without a Viper seat or other climber. The climbers provided with these stands are designed to aid you in the correct operation of the treestand while climbing by keeping your weight away from the tree. The seat climber is also built so that it fits securely with the platform for carrying.

Part 3. Using Your New Stand.

⚠ WARNING

NEVER DISCONNECT FROM YOUR SAFETY HARNESS OR SAFETY LINE ONCE YOU LEAVE THE GROUND!!

Step 1. When you get to your hunting height (do not climb higher than 15 feet; it is unnecessary) and you have assured that your treestand is level, position your seat climber slightly below waist level. Slightly lower will be more comfortable but higher makes for less movement when you stand.

Step 2. Wrap the supplied green tourniquet buckle strap (1” strap with spring loaded buckle) around the tree and through the seat frame as shown in *Figure 29*. Securely tighten the strap to prevent the notched teeth area from losing contact with the tree.



Figure 28



Figure 29

Summit products are manufactured under one or more of the following US Patents: 5,937,969; 5,971,104; 5,975,242; 5,979,603; 6,125,966; 6,182,792; 6,397,973; D,417,011; D,420,147; D,575,411
Summit Bucksteps are Patent Pending

Step 3. Unhook the bungee cord that held the seat back rest secure while you were climbing. Position the seat back rest by wrapping each end of the bungee cord around the climbing cable and hooking the two hooks together as shown in *Figure 30* or by wrapping it around the tree. The bungee cord will prevent the seat backrest from falling forwards if you stand up.

Step 4. With your safety harness attached to the tree above the climber, simply pull your feet, one at a time, from their secured position under the RapidClimb stirrups.

Step 5. Position your safety harness to minimize the amount of slack in the safety line then carefully sit down. The treestand seat will provide maximum comfort when the seat pad is near horizontal rather than tipped down in the front. The seat height can be easily raised (for bow hunting) or lowered (for gun hunting) by adjusting the two piece buckles



Figure 30

CAUTION
Seat strap adjustments must be made on the ground.

Both seat sides must be adjusted evenly so the seat is level side to side. Sliding the webbing straps forward or backward on the frame provides additional comfort.

Part 4. Climbing Down With Your New Stand.

WARNING
NEVER DISCONNECT FROM YOUR SAFETY HARNESS OR SAFETY LINE BEFORE YOU REACH THE GROUND!!

Step 1. Reattach your treestand platform to your feet - Follow the steps in Part 2, Step 2.

Step 2. Disconnect the elastic cord that has been holding the foam seat in place and fold the seat up. Secure the backrest and seat as shown previously in *Figure 25*. Disconnect and store the strap that has held the seat frame to the tree (shown in *Figure 29*).

Step 3. Place the seat climber at about knee level, sit on the padded bar and grasp the upright arms as you did when climbing (see *Figure 26*).

Step 4. While firmly grasping the seat climber upright arms, disengage the platform by lifting up and tipping the edge closest to the tree downward. Once the platform has been dislodged, you can lower it down (see *Figure 27*). Make slow, even movements of 10-12 inches at a time.

Step 5. To re-engage, rotate the top edge of the treestand closest to the tree upwards. Now carefully place your weight back on the platform.

Figure 31



Figure 32



Figure 33



Figure 34

WARNING
DO NOT JUMP OR BOUNCE ON THE PLATFORM OR SEAT to attempt to cause it to "dig" into the tree. It is not necessary and may cause you to inadvertently disengage the platform or seat.

Step 6. Once the platform is secure, slide your safety harness tether strap down to about chest height and repeat steps 3-6 until you have reached the bottom of the tree.

Good Hunting and Hunt Safe!

HUNT TOMORROW...
...USE YOUR SAFETY HARNESS TODAY!
©(STLLC 2008)



Figure 35



Figure 36

Part 5. Backpacking / Carrying Your New Treestand.

Your treestand is designed to “nest” together as one unit making it easy to transport.

Step 1. Un-clip the backpack strap tether from the platform yolk and Re-clip it around the perimeter tubing of the seat climber. If your backpack straps are connected to the platform, you must Re-clip it around the second platform run.

Step 2. Start with the seat climber portion of the stand, set it on its end as shown in *Figure 31*.

Step 3. Take the platform and slide it into the seat climber so that its upright braces and cable bracket are next to the same areas on the seat climber as shown in *Figure 32*.

Step 4. The teeth area on the platform should come into contact with the “V” brace on the seat climber. From this position, pull the seat backrest through the large gap in the platform as shown in *Figure 33*.

Step 5. Secure the seat to the stand by running the seat bungee around the frame and clipping it off. *Figure 34*.

Step 6. Secure the top and platform together with the 1” wide green strap with the spring loaded tourniquet buckle as shown in *Figure 35*. This will prevent seat the seat and the platform from making noise as you hike to your hunting location.

Step 7. Use the backpack straps to carry the unit on your back as shown in *Figure 36*. Pull the loose end of the straps to tighten and pull up on the buckle to release.

Section 3. Maintenance and Care of Your Treestand.

Because of the quality construction techniques used in manufacturing, your Summit Treestand is very durable under normal hunting conditions. However, since all hunting equipment that is exposed to the elements requires some maintenance and care, the following guidelines for caring for your treestand should be used.

CAUTION

DO NOT leave your treestand outdoors when it is not being used. Any tubing that is allowed to fill with rainwater and freeze WILL rupture or burst. DO NOT use your treestand if this happens.

If your treestand is exposed to the elements, it will be necessary to cover the seat to prevent rain and moisture from saturating the material. This will extend the life of the seat material as well as make it more comfortable the next time it is used. The powder coat finish that is applied at the factory is very durable and should need touch ups only in areas of heavy wear or accidental impact. Should you damage any part of your Summit Treestand, contact your nearest authorized Summit dealer or the factory to obtain the proper corrective action procedure and/or replacement parts for the treestand. Unauthorized repairs, modifications, or alterations will void the warranty and could degrade the integrity of the treestand. You must perform periodic inspections of the treestand for damage.

Section 4. Limited Warranty

(A) Warranty

Summit Treestands, LLC (Summit) warrants to the original retail purchaser that all products manufactured by it are free from defects in material and manufacture at the time of shipment for sixty (60) months from the date of purchase. Summit will repair or replace any part found defective if the unit claimed to be defective shall be returned to Summit, postage prepaid, within the warranty period.

This warranty shall not apply to any product which has been subjected to misuse; misapplication; neglect (including but not limited to improper maintenance); accident; improper installation; modification (including but not limited to use of unauthorized parts or attachments); adjustment or repair. THE FOREGOING IS IN LIEU OF ALL OTHER WARRANTIES, WHETHER EXPRESS OR IMPLIED (INCLUDING THOSE OF MERCHANTABILITY AND FITNESS OF ANY PRODUCT FOR A PARTICULAR PURPOSE), AND OF ANY OTHER OBLIGATION OF LIABILITY ON THE PART OF THE COMPANY.

(B) Limitation of Liability

It is expressly understood that Summit’s liability for its products, whether due to breach of warranty, negligence, strict liability, or otherwise, is limited to the repair of the product, as stated above, and Summit will not be liable for any other injury, loss, damage, or expense, whether direct or consequential, including but not limited to loss of use, income, profit, or damage to material, arising in connection with the sale, installation, use of, inability to use, or the repair or replacement of Summit’s products.

Summit reserves the right to make alterations or modifications in its products at any time, which in its opinion, may improve the performance and efficiency of the product. It shall not be obligated to make such alterations or modifications to products already in service.

Please fill out the warranty card and return to:

SUMMIT Treestands, LLC. -- 715 Summit Dr.
Decatur, AL 35601

Cut Along Line

Warranty Card for RealTree Outfitters Viper

Owners Name: _____
Street Address: _____
City: _____ State: _____ ZIP: _____
Phone: (____) _____
Date Purchased: _____ Price \$: _____
Purchased From (Dealer Name): _____
Your heard about us through: Magazine Advertisement Video
Friend Summit Catalog
Other
Please Explain: _____

Cut Along Line

You can also register your warranty card on line at:
www.summitstands.com/warranty.asp

⚠️ WARNING

DO NOT use the treestand if ANY obvious or suspected damage is observed. Contact Summit for proper replacement action.

⚠️ WARNING

It is VERY IMPORTANT to inspect the cable on your climbing treestand to ensure that there is no sign of frayed, damaged or broken strands. If ANY such damage is noticed, you must replace your cable IMMEDIATELY. Replacement covering for the cables is also available as a replacement part.

NOTICE

The plastic covering on the cables serves ONLY as a noise reducer. Over time your cable cover will begin to wear. This is normal.

⚠️ CAUTION

Before EACH use, look for nicks, gouges, cuts, cracks, bends, corrosion or similar damage that can be the result of improper use or accidental damage. For instance, this could occur if someone else used the treestand without knowledge of its proper use, or if the treestand were dropped, hit by a motor vehicle or subject to corrosive conditions, etc.

Summit Treestands have the highest structural integrity by design, material selection and manufacturing techniques, but as its owner, only your continued care will assure trouble free performance. When the above-mentioned guidelines are followed, your Summit Treestand will provide years of successful hunting.

Section 5. Parts List

BOX CONTENTS

PN	DESCRIPTION	QTY
81062	Platform	1
81053	Viper Ultra Top	1
70209	Viper Ultra Foam Seat	1
30700	Climbing Cable	2
40123	Footrest Bar	1
72006	Accessory Packet	1

72006 - ACCESSORY PACKET CONTENTS

PN	DESCRIPTION	QTY
10534	Stirrup	2
30341	Stirrup Bungee with hook	1
70225	36" Front Pad Viper models	1
70223	12" Arm Pad	2
85051	In-Line Cable Ties	6
83054	Summit 4 Point Safety Harness with Attached SRS Strap	1
	Treestand Safety Strap	1
10953	Suspension Relief Strap with Instructions	1
30283	1" Camo Backpack Strap	2
40273	2" Camo Backpack Strap with Clip	1
30285	Tourniquet Strap with Buckle (green)	1
	2007 DVD	1
	Monster Bucks XIV Vol. 2 DVD	1

Written Treestand Instructions
Written Instructions for Summit Harness

Section 6. Harness Suspension

It is necessary and very important that someone knows your hunting location and time of return. It is also very important that you carry (on your person) emergency communication devices such as a cell phone, two-way radio, whistle, signal flare or preferably a PLD (Personal Locator Device - FCC approved July, '03). When triggered, a PLD will transmit an emergency signal to local rescue teams identifying your location via satellite GPS coordinates. PLD's may be purchased at Wilderness outfitters or on the internet.







Suspension trauma or blood pooling can occur when suspended motionless in a harness for periods of time. This can lead to unconsciousness and death.

⚠️ WARNING

If you have to hang in the tree before help arrives, you need to exercise your legs by pushing off from the tree or by using the enclosed suspension relief strap. See the treestand harness instructions and the enclosed instructions for more information.

Self extraction may be necessary in the unfortunate situation that (A) no one knows your location, (B) your communication efforts are exhausted, (C) you are confident that you have the strength, dexterity and ability to perform self-extraction and (D) you decide this is your "absolute last resort". It is recommended to carry a device to assist with this self-extraction. Simple devices such as screw-in steps or a rope "Tree Descender" (available from Summit) will allow you to remove the weight from your harness. This may enable you to return to the treestand/ladder/climbing steps or slowly descend the tree.

HARDWARE FOR VIPER ULTRA

PN	DESCRIPTION	QTY
10600	1 1/2" Bolt (1/4 x 20)	2
		
10640	Long Shank Bushing	6
		
10641	Short Shank Bushing	2
		
10612	Center Lock Nut	2
		
10635	Self Tapping Screw	4
		
10122	Footrest Bracket (Not to Scale)	2
		
10668	Footrest Bumpers	2
