



715 Summit Dr. SE  
Decatur, AL 35601  
Phone (256) 353-0634  
Fax (256) 353-9818  
[www. Summitstands.com](http://www.Summitstands.com)  
[www. Pak-Mule.com](http://www.Pak-Mule.com)  
[www. Plot-Mule.com](http://www.Plot-Mule.com)

**ASSEMBLY INSTRUCTIONS  
AND  
OWNERS MANUAL**

**PLOT MULE  
ATV HIGH SPEED DISC HARROW**

**Part # 84006**

**CUSTOMER MUST RECEIVE COPY OF THIS OWNERS MANUAL/INSTRUCTIONS**

## Plot Mule User Instructions

\*The following is only a recommendation for discing and planting food plots or gardens.  
\*We recommend running in low range while using this product

The Plot Mule ATV disc harrow has four different disc angle adjustments (0°, 10°, 15° and 20°) for various soil types or cutting applications. The Plot Mule also has the ability to raise or lower the transport wheels. This feature allows the operator to control the desired depth of cut or to simply transport to and from the food plot or garden. The figures below show the versatility of the disc harrow.

**Figure 1:** Shown here the user is adjusting the wheels either up or down by simply turning the ratchet jack. This enables the user to control the depth of cut and transport the Plot-Mule to and from food plots without having the disc engaged in the soil.



**Figure 1**

**Figure 2:** Here and in Figure 1 the Plot Mule is shown with the disc at 20°. This is the most aggressive setting and is generally used on hard compacted soils such as clays or if the area is covered with heavy vegetation.

**NOTE: This setting requires more pulling power from the ATV. Use Caution not to over heat the ATV. IF over heating does occur lower the angle or the wheels to**




**reduce the load applied to you ATV. It is recommended to use the lowest gear of the ATV for all operation using the 20 degree setting. Discontinue Use If Over Heating Continues!**


**Figure 3:** Here the Plot Mule is shown with the disc at 15°. This is the MFG recommended setting for most soil types. It is aggressive enough for most conditions and reduces the load on the ATV.



**Figure 4:** Here the Plot Mule is shown with the disc at 10°. This setting is mostly used for leveling, light discing or for covering seed. When covering seed, be sure to follow the recommended depth for the specific seed being planted. Raise or lower the transport wheels to control depth.

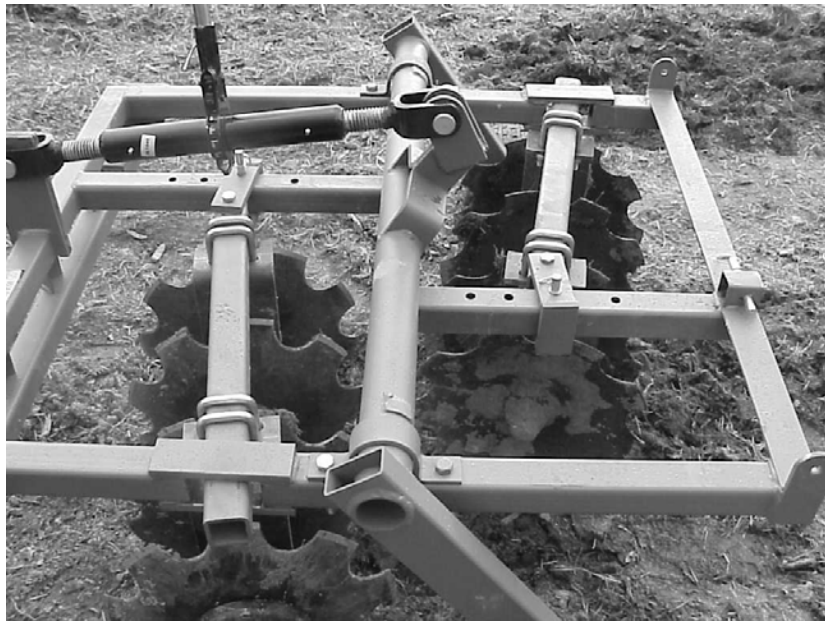

**Figure 5:** Here the Plot Mule is shown with the disc at 0°. This setting can be used to level ground, aerate, or cover seed.

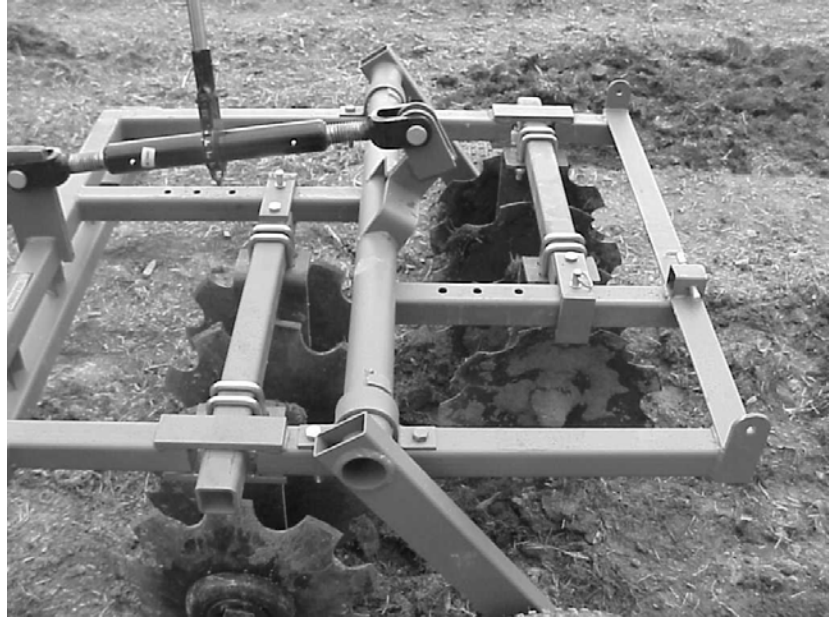

**Figure 6:** The Plot Mule also has an adjustable coupler to allow adjustment height of the coupler to your specific ATV. Adjust the coupler with the wheels up and disc setting on the ground. This must be adjusted to equally distribute the cutting action between the front and rear gangs.



**WARRANTY CARD FOR PLOT MULE ATV HIGH SPEED DISC HARROW**

**Please complete and return within 15 days from date of purchase.**

**Mail To: Summit Treestands, LLC**

**ATV Division**

**715 Summit Drive SE**

**Decatur, AL 35601**

**Product Purchased:** \_\_\_ Pak Mule ATV Trailer, \_\_\_ Pak Mule Tandem ATV Trailer,  
\_\_\_ Plot Mule ATV High Speed Disc Harrow, \_\_\_ Pak Mule Spreader,  
\_\_\_ Pak Mule 55 Gallon Sprayer, \_\_\_ Pak Mule Barbed Wire Mount

**Owners Name** \_\_\_\_\_ **Street Address** \_\_\_\_\_

**City** \_\_\_\_\_ **State** \_\_\_ **Zip** \_\_\_ **Phone** (\_\_\_\_) \_\_\_\_\_

**Date Purchased** \_\_\_\_\_ **Purchased From (Dealer Name)** \_\_\_\_\_ **Price \$** \_\_\_\_\_

**You heard about us through:** \_\_\_ Magazine Advertisement \_\_\_ Video \_\_\_ Friend \_\_\_ Catalog

**Other - Please Explain**

\_\_\_\_\_.