

Instruction Booklet Summit ATV Plot Mule Flip Disc

2006 84020



Please read carefully **BEFORE** using you new Summit ATV Product.

Congratulations! You have purchased the finest commercially available ATV implement on the market today. Summit ATV Products are designed and built to provide years of trouble-free, successful use. This booklet is provided to you to outline the recommended use, care and maintenance of your Summit ATV Product.

Warnings and Precautions

- FAILURE TO READ, UNDERSTAND AND FOLLOW THESE INSTRUCTIONS MAY LEAD TO SERIOUS INJURY OR DEATH!
- READ, UNDERSTAND AND OBEY YOUR ATV'S INSTRUCTION / SAFETY MANUAL BEFORE USING THIS PRODUCT! ALWAYS WEAR A HELMET!
- DO NOT EXCEED A SAFE SPEED FOR THE TERRAIN AND SOIL CONDITIONS ENCOUNTERED! NEVER USE ON STEEP SLOPES! NEVER EXCEED YOUR RIDING CAPABILITIES!
- DO NOT EXCEED YOUR ATV'S MAXIMUM RATED TOWING CAPACITY MINIMUM ATV REQUIRED 300cc!
- DO NOT OPERATE IF YOU HAVE BEEN USING DRUGS OR ALCOHOL!
- SUMMIT'S LINE OF ATV IMPLEMENTS ARE DESIGNED FOR USE WITH AN ATV OR GARDEN TRACTOR ONLY. <u>DO NOT USE</u> WITH A CAR, TRUCK OR ANY OTHER VEHICLE!
- SUMMIT'S LINE OF ATV IMPLEMENTS ARE NOT DESIGNED FOR HIGH SPEED TRANSPORT ON PUBLIC ROADS!
- YOU MUST USE A 2" BALL TO CONNECT THE FLIP DISC TO YOUR ATV!
- DO NOT USE THE PLOT MULE FOR HUMAN TRANSPORTATION!
- KEEP BYSTANDERS AND CHILDREN CLEAR WHEN OPERATING!
- KEEP HANDS, FINGERS AND FEET CLEAR OF ALL POTENTIAL PINCH POINTS DURING ADJUSTMENT AND OPERATION FAILURE TO DO SO MAY RESULT IN SERIOUS INJURY OR DEATH!
- CHECK AND RETIGHTEN ALL BOLTS PRIOR TO EACH USE!
- THOROUGHLY RINSE AFTER USE WITH FERTILIZERS OR OTHER CHEMICALS!
- LUBRICATE ALL MOVING PARTS AFTER EVERY USE!
- LUBRICATE ALL GREASE FITTINGS BEFORE FIRST USE!
- USE CAUTION WHEN CUTTING THE BANDING MATERIAL HOLDING THE PLOT MULE FD TO THE SHIPPING SKID. BANDS MAY BE UNDER TENSION AND WILL HAVE SHARP EDGES!
- BEWARE OF THE FOLLOWING CRUSH POINTS:

- PLOT MULE FD COUPLER ADJUSTMENT - SECTION 1, STEP 1 AND 6 - KEEP FINGERS AWAY FROM COUPLER JOINT!

www.summitATV.com

Section 1. Transporting and Using your Flip Disc.

Step 1. If it is not already, flip the Flip Disc up and onto its wheels. To do this, grab the tongue assembly and rotate it up. Continue until the wheels are on the ground as shown in **Figure 1**. Remove the pin holding the tongue assembly in place and flip it so that the coupler assembly is facing down as shown in **Figure 2**.

Step 2. Attach to your ATV's ball hitch.

Step 3. To use the Flip Disc, first grab onto the tongue assembly and release the coupler from the ATV hitch. The weight of the disc will push the front up as you do this. Take care not to let it hit your ATV.

Step 4. Roll it back a few feet and then spin it 180 degrees so that the tongue is facing away from your ATV as shown in **Figure 3**.

Step 5. Grab the tongue assembly and rotate it up. Continue until the discs are on the ground.

Step 6. Remove the pin holding the tongue assembly in place and flip it so that the coupler assembly is facing down as shown in **Figure 4**.

Step 7. Re-attach to your ATV's ball hitch.

Your ready to use Flip Disc should look like Figure 5.

Section 2. Maintenance and Care of Your Plot Mule.

Part 1. Grease fittings.


• Wheels - After each use.

The Disc blades use sealed bearings.

Replacement parts are available at www.summitATV.com





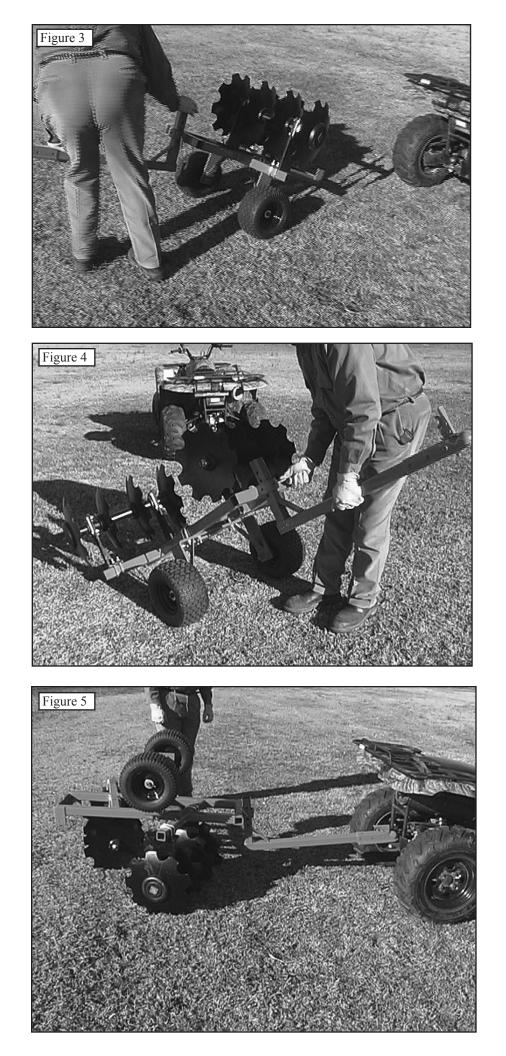

Limited Warranty

(A) Warranty

Summit Treestands, LLC (Summit) warrants to the original retail purchaser that all products manufactured by it are free from defects in material and manufacture at the time of shipment for twelve (12) months from the date of purchase. Summit will repair or replace any part found defective if the unit claimed to be defective shall be returned to Summit, postage prepaid, within the warranty period.

This warranty shall not apply to any product which has been subjected to misuse; misapplication; neglect (including but not limited to improper maintenance); accident; improper installation; modification (including but not limited to use of unauthorized parts or attachments); adjustment or repair. THE FOREGOING IS IN LIEU OF ALL OTHER WARRAN-TIES, WHETHER EXPRESS OR IMPLIED (INCLUDING THOSE OF MERCHANTABILITY AND FITNESS OF ANY PRODUCT FOR A PARTICULAR PURPOSE), AND OF ANY OTHER OBLIGATION OF LIABILITY ON THE PART OF THE COMPANY.

(B) Limitation of Liability

It is expressly understood that Summit's liability for its products, whether due to breach of warranty, negligence, strict liability, or otherwise, is limited to the repair of the product, as stated above, and Summit will not be liable for any other injury, loss, damage, or expense, whether direct or consequential, including but not limited to loss of use, income, profit, or damage to material, arising in connection with the sale, installation, use of, inability to use, or the repair or replacement of Summit's products.

Summit reserves the right to make alterations or modifications in its products at any time, which in its opinion, may improve the performance and efficiency of the product. It shall not be obligated to make such alterations or modifications to products already in service.

Please fill out the warranty card on the back of these instructions and return to:

SUMMIT Treestands, LLC. 715 Summit Dr. Decatur, AL 35601

You can also register your warranty card on line at: www.summitstands.com/warranty.aspx

©(STLLC 2006)

Replacement Parts List:

PN	Description
55114	Wheel with Tire
15523	Clevis pin
15198	Individual Disc
15415	Sealed Disc Bearing
25200	Disc Standard
15412	3 1/2" Disc Casting
15411	2 1/4" Disc Casting
15410	7 1/2" Disc Casting
15413	1 1/8" Disc Casting

Cut Along Line			Cut Along Line		
	Warranty	Card for Summit	ATV Plot Mule Flip Disc		
Owners Name: Street Address:					
City:	State:	ZIP:	Phone: ()	
Date Purchased: Purchased From (Dealer Name):				Price \$:	
Your heard about us through: Magazin Other Please Explain:				Catalog	