


# PRO-LAM *PHOTO*

6 Roller **Photo** Laminator



## 6 Roller *PHOTO* POUCH LAMINATOR

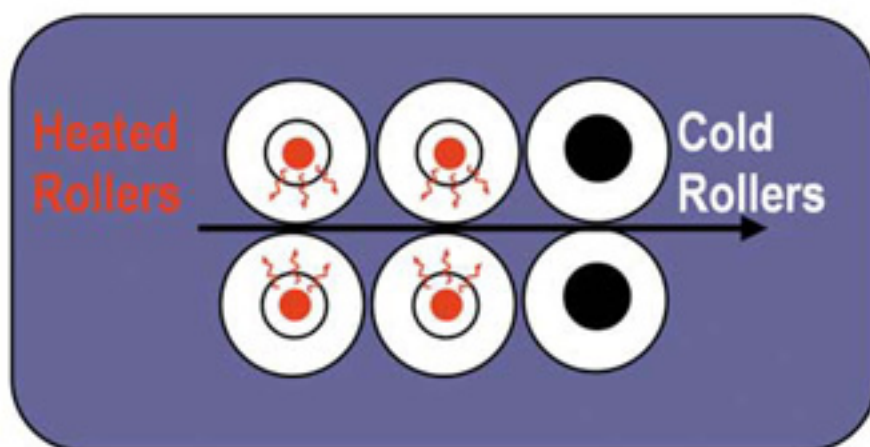

◆ PROFESSIONAL- USE


◆ EXTRA CRYSTAL-CLEAR  
LAMINATION

◆ VARIABLE SPEED & TEMP

◆ PHOTO-READY

◆ LED DISPLAY

# PRO-LAM *PHOTO* 6 Roller Photo LAMINATOR

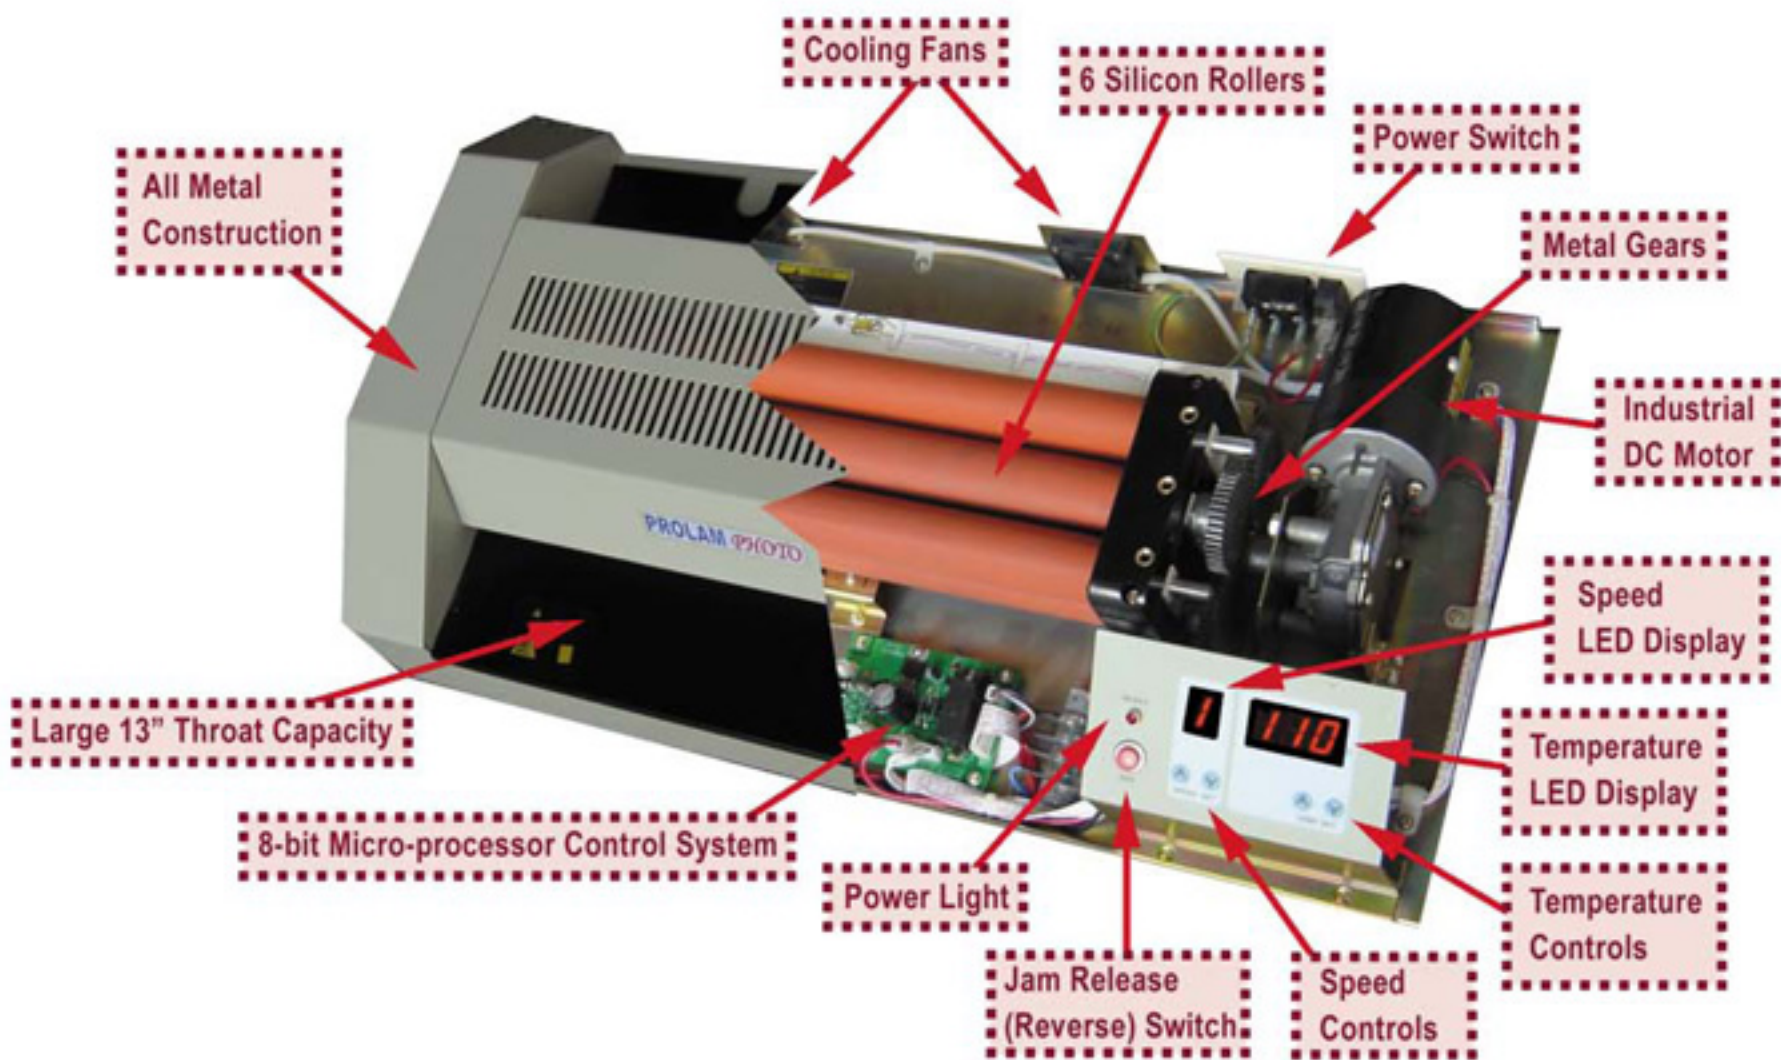

- ▶ **6 Roller Thermal System** (4 heated rollers + 2 Cold rollers) allows for a more professional, crystal-clear, bubble-free lamination finish.
- ▶ **Advanced Photo-Ready Technology** provides a balanced heat dissipation during laminating process, making it perfect for laminating photographs and other hard-to-laminate materials.
- ▶ **Variable Speed & Temperature Control Combination** allows for a fast lamination of all standard pouch thicknesses (from 3 mils up to 10 mils) with the simple press of a button (no waiting period when changing thickness).
- ▶ **Exclusive "Flex-Tite" System** allows the rollers to adjust themselves and maintain the proper laminating pressure with different material thickness. Perfect for hot foiling and mounting.
- ▶ **8-bit Micro-Processor Control System** precisely sets the exact temperature & speed for a fast, consistent and user-friendly laminating experience.
- ▶ **Energy Saving Stand-by Mode** to conserve energy and prolong the lifespan of your laminator.
- ▶ **Overheat Protection System** automatically cuts off heating power if temperature exceeds 160°C (320°F).
- ▶ **All Metal Construction** for a more professional, heavy duty look & a longer lasting lifespan.

- ▶ **Auto Memory Function** machine will remember the last speed & temperature settings before turning off, saving you the trouble of re-adjusting the settings next time you turn it on.
- ▶ **Silicon Rollers** provide the flexibility of laminating with or without a carrier.
- ▶ **Metal Gears & Industrial Motor** (1150 Watts / 12V) to guarantee strength and durability.
- ▶ **Jam Release (Reverse) Switch** allows easy corrective action for jams.
- ▶ **Cold Lamination Function**
- ▶ **CE & TUV Certified and Approved**

## SPECIFICATIONS

|                          |                                    |
|--------------------------|------------------------------------|
| Throat Capacity:         | 330 mm (13")                       |
| Motor:                   | DC 12V / 1150W                     |
| Laminating Heat Range:   | 32 - 320°F                         |
| Maximum Pouch Thickness: | 10 mils (250 Mic.)                 |
| Temperature Control:     | Electronic (8-bit Micro Processor) |
| Laminating Speed:        | Variable (12"-59"/min)             |
| Cover:                   | Metal                              |
| Volume:                  | 2.0 CbFt                           |
| Weight:                  | 17.7 Kg (39 Lbs)                   |
| Warranty:                | One year                           |

AUTHORIZED DEALER: