



B Mounting the Display Brackets




When attaching the Brackets to the Display, use the markings on the brackets to ensure that both brackets are vertically aligned. Ensure that the markings are positioned towards the top of the display and that the tightest fitting hole in the multi washer is used when attaching the mounting screw to the display.

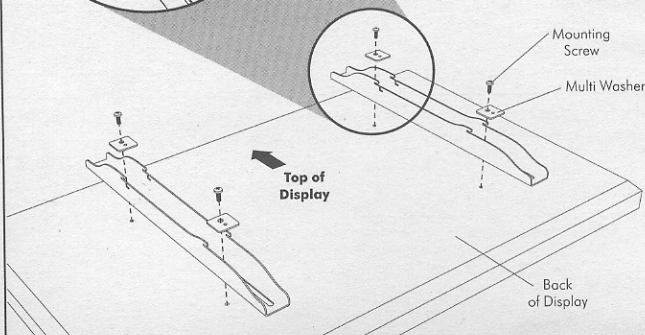

Recessed Mounting Holes


If the mounting holes are recessed into the back of the display, use the supplied Recessed Hole Bushes to pack the recessed hole. If the brackets require further clearance from the display, attach the Spacer Bushes. Ensure that the brackets are securely fixed to the display.

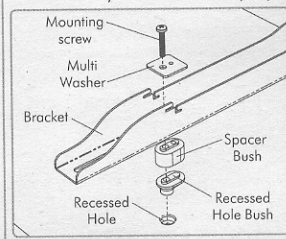


C Attaching the display to the wall plate

Note: This procedure will require two persons

With the Brackets attached to the display, lift the display and hook the brackets onto the Wall Plate as shown.

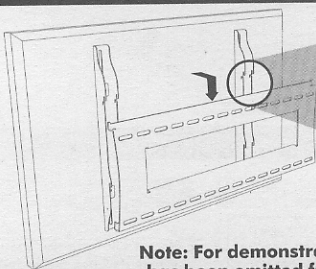



Note: For demonstration purposes, the wall has been omitted from the above images.

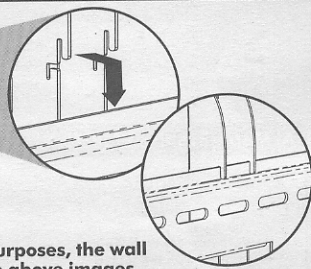


D Security Option

Note: For demonstration purposes, the display has been omitted from the images below.

D.1.

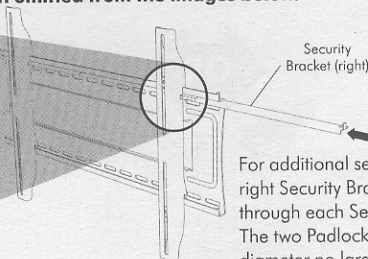

D.2.

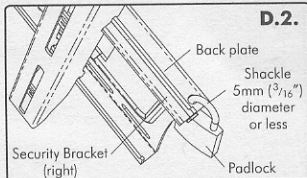

For additional security, it is suggested that the left and right Security Brackets be inserted and a Padlock attached through each Security Bracket and the Wall Plate as shown. The two Padlocks (not supplied) should have a shackle diameter no larger than 5mm ($\frac{3}{16}$ ").