INSTRUCTION SHEET - TL-CPU



Customer Service Dept 2245 Delany Rd Waukegan, IL 60087 Ph: 847/244-1800 • 800/323-4656 Fax: 847/244-1818 • 800/327-1698

PARTS LIST

- 1 Top Plate (2 parts)
- 1 Bottom Plate (2 parts)

1/2" retain-


- 2 Leg clamps
- 6 Small Screws
- 6 Large Screws
- 12- Nuts

Tools Required: Screwdriver

1. BOTTOM SECTION

Using 4 large screws, fasten bottom plate onto bottom bracket. Slide B over A and attach at desired width; 1/2" lip facing up. Use one small screw and nut in each slot to hold in place. Hook bottom section onto table frame.

Leg clamp goes around table leg. Attach clamp to top plate; lips facing up. Using the large screws, secure bottom unit to table leg. CPU unit will stand on this section.

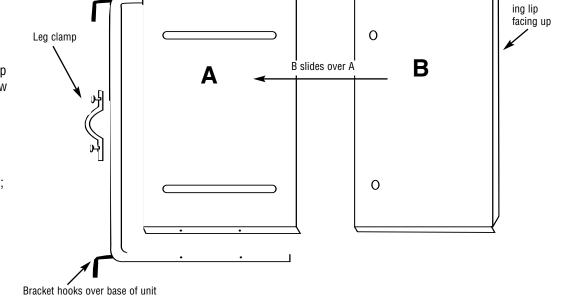

2. TOP SECTION

B slides over A and attaches at desired width; 3/4" lip and 2" lip facing down. Use one small screw and nut in each slot to hold in place.

Leg clamp goes around table leg. Attach clamp to top plate; lips facing down. Using the small screws, secure top unit to table leg. Top plate will rest on CPU unit to hold in place.

