

# Instruction Sheet Model LMC, LMC2



Customer Service Dept  
2245 Delany Rd  
Waukegan, IL 60087

Ph: 847/244-1800 • 800/323-4656  
Fax: 847/244-1818 • 800/327-1698



**LMC**




**LMC2**

## Parts List

- |                                  |                       |
|----------------------------------|-----------------------|
| 8- Self-tapping screws           | 1- Door               |
| 20- Cup head screws              | 1- Drawer             |
| 3- Long pan head phillips screws | 1- Slide out shelf    |
| 23- Washers                      | 1- Lower cover beam   |
| 1- Handle                        | 2- Rubber stoppers    |
| 2- small screws for handle       |                       |
| 4- runners                       | LMC2 Only:            |
| 4- Casters                       | 1- Inner shelf        |
| 2- Side panels                   | 4- Self supports      |
| 1- Back panel                    |                       |
| 1- Base                          | <b>Tools Required</b> |
| 1- Bottom Shelf                  | 1- screw driver       |

### Step 1

Assemble back and side panels by sliding locking tabs together.

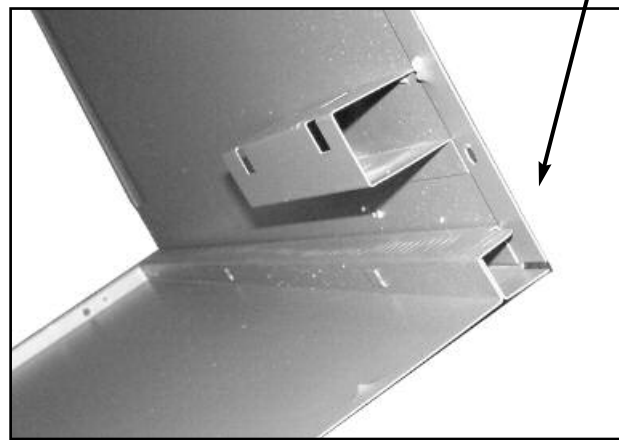


### Step 2

Lift back and side panels onto base frame making sure the tabs slide over inside of base.




### Step 3

Lay unit on back and install two self tapping screws through back panel into base frame.

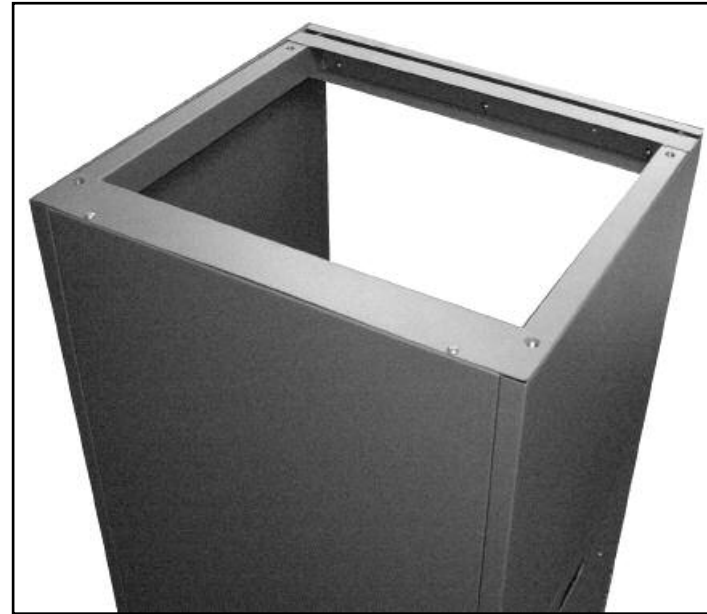


### Step 4

Install lower cover beam using three cup head screws and washers.

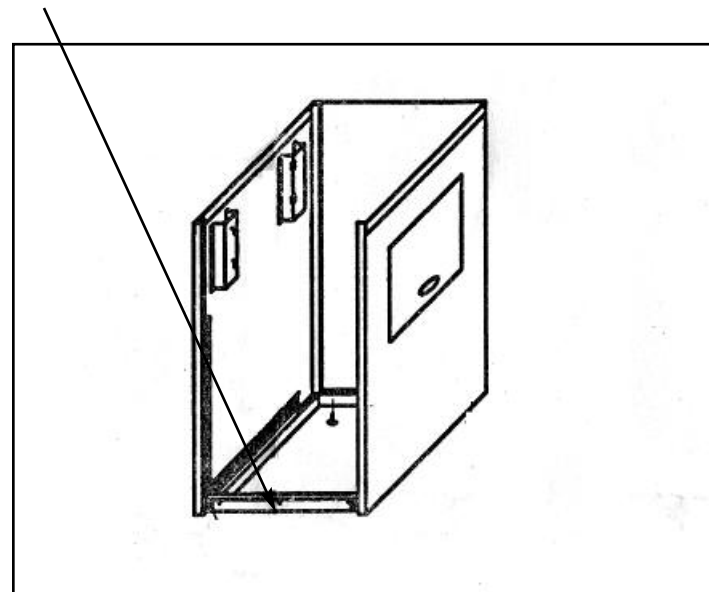


### Step 5

Turn unit right side up and install bottom panel.

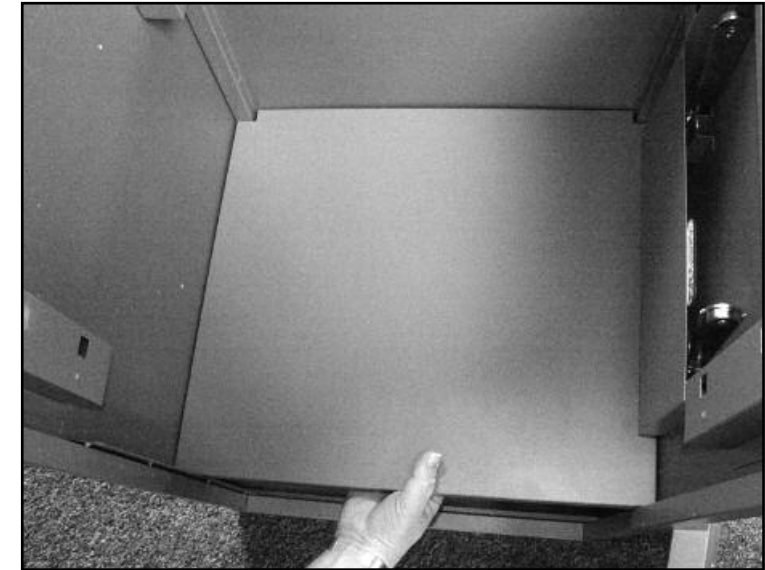

### Step 6

Install door with 4 self tapping screws.

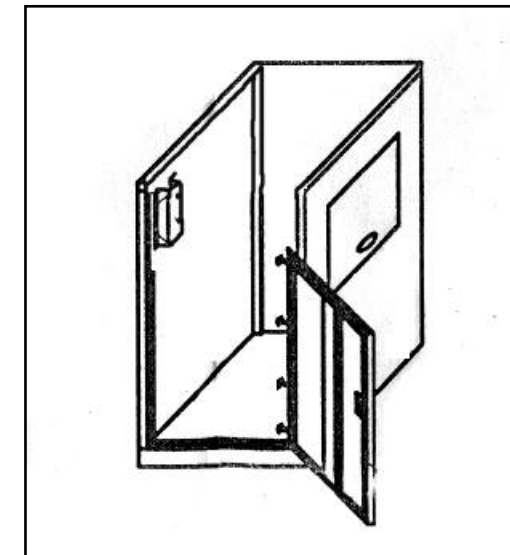

# Runner Instructions




**When installing runners on drawer and shelf slide horizontal tab into slot on front of drawer first then push vertical tab up into place. Tab should only slide up into slot on drawer (as shown), if the tab is facing down then the runner is on the wrong side of drawer. Remove and mount on other side.**



**After runners are installed on drawers mount runners on slots inside of unit as shown (note: runners should already be attached to drawer/shelf, the above picture shows runner without drawer for illustrative purposes). Slide horizontal tab into slot at back of unit first, then push vertical tab down into slot at front of unit. If vertical tab is facing up the runners are on the wrong side of the drawer. Remove and mount using above instructions.**


## Step 7

Install drawer with attached runners first following instructions at left, then install top sliding shelf using same instructions. After drawer and shelf are in place install top of unit pushing firmly to lock into place.

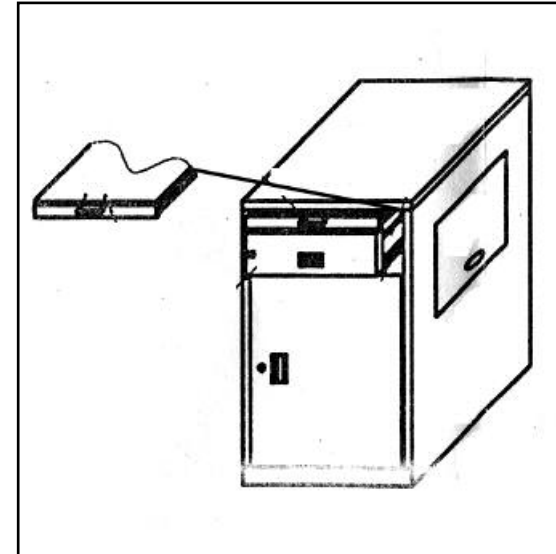

## Step 8

Turn unit upside down and install casters. (casters with breaks are typically installed on front of unit).

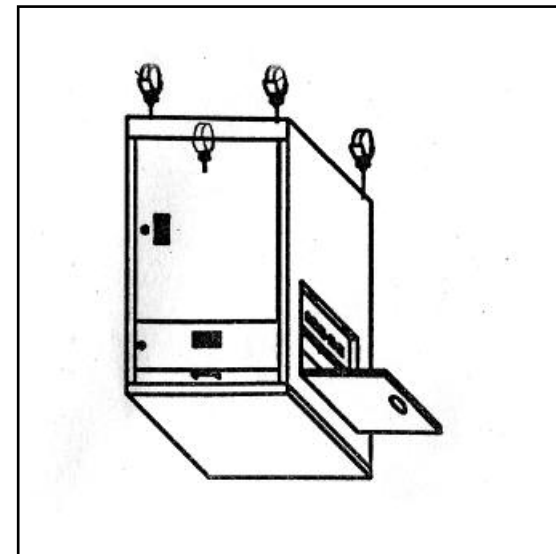

## Step 9 For LMC2 ONLY

Insert shelf holder brackets into tabs at desired height on inside of unit making sure all tabs are at the same height. Place shelf inside on brackets.

