

# Installation Instructions


Model Name: LUD3

## 32"-60" UNIVERSAL FIXED WALL MOUNT


### Important Notes

- The 32"-60" Universal Fixed Wall Mount supports LCD and Plasma Flat Panel Displays from 32" (81cm) to 60" (152cm) and supports a maximum load of 91kgs (200lbs).
- This product suits displays with mounting hole patterns from 180mm to 740mm wide (7"-29") by 100mm to 500mm high (4"-20").
- The manufacturer does not accept responsibility for incorrect installation.

### Component Checklist



Wall Plate



Display Bracket (x2)

### Bits Bag



Coach Screw (x4)



Washer (x4)



Masonry Wall Plug (x4)




Multi Washer (x4)



Recessed Hole Bush (x4)



Spacer Bush (x4)



Security Bracket (right)



Security Bracket (left)

### TOOLS REQUIRED:

- Power Drill
- 12mm or 8mm Drill Bit
- Phillips Head Screw Driver
- Spirit Level
- 17mm ( $1\frac{1}{16}$ ") Socket Wrench or Shifter

### Mounting Screws




- M8x15mm / M8x35mm / M8x45mm (x4 each)
- M6x15mm / M6x35mm / M6x45mm (x4 each)
- M5x15mm / M5x35mm / M5x45mm (x4 each)
- M4x15mm / M4x35mm / M4x45mm (x4 each)

### A Mounting the Wall Plate

#### Masonry Wall

Note: Ensure the Wall Plate is mounted with the folded tabs pointing upwards.

TIP: Use a spirit level to ensure the wall plate is horizontal

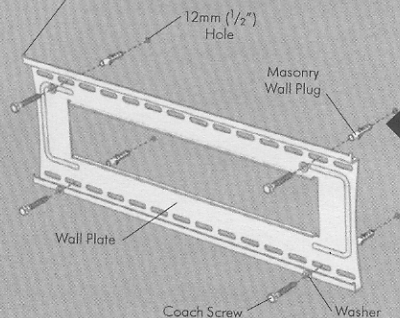

#### Timber Stud Wall

Note: Ensure the Wall Plate is mounted with the folded tabs pointing upwards.

TIP: Use a spirit level to ensure the wall plate is horizontal

