



Instructions for the Pro-Line Add On Timer

THANK YOU for your purchase of the **Pro-Line Add On Timer** a top quality Moultrie product. Please read both sides of this sheet before operating this unit. If you should have any questions about this or any other Moultrie product, please contact us using the information on the reverse side.


To help us better serve you, please complete and mail the enclosed Warranty Card.

I INSTALLATION



The Pro-Line Timer installs onto the two mounting posts located on the Pro-Line Control Panel.

- 1 With the wording on the Timer oriented the same as on the Control Panel, slide the Timer onto the Control Panel Mounting Posts until firmly seated.
- 2 Secure the Pro-Line Add On Timer to the Control Panel using the two thumb screws provided.

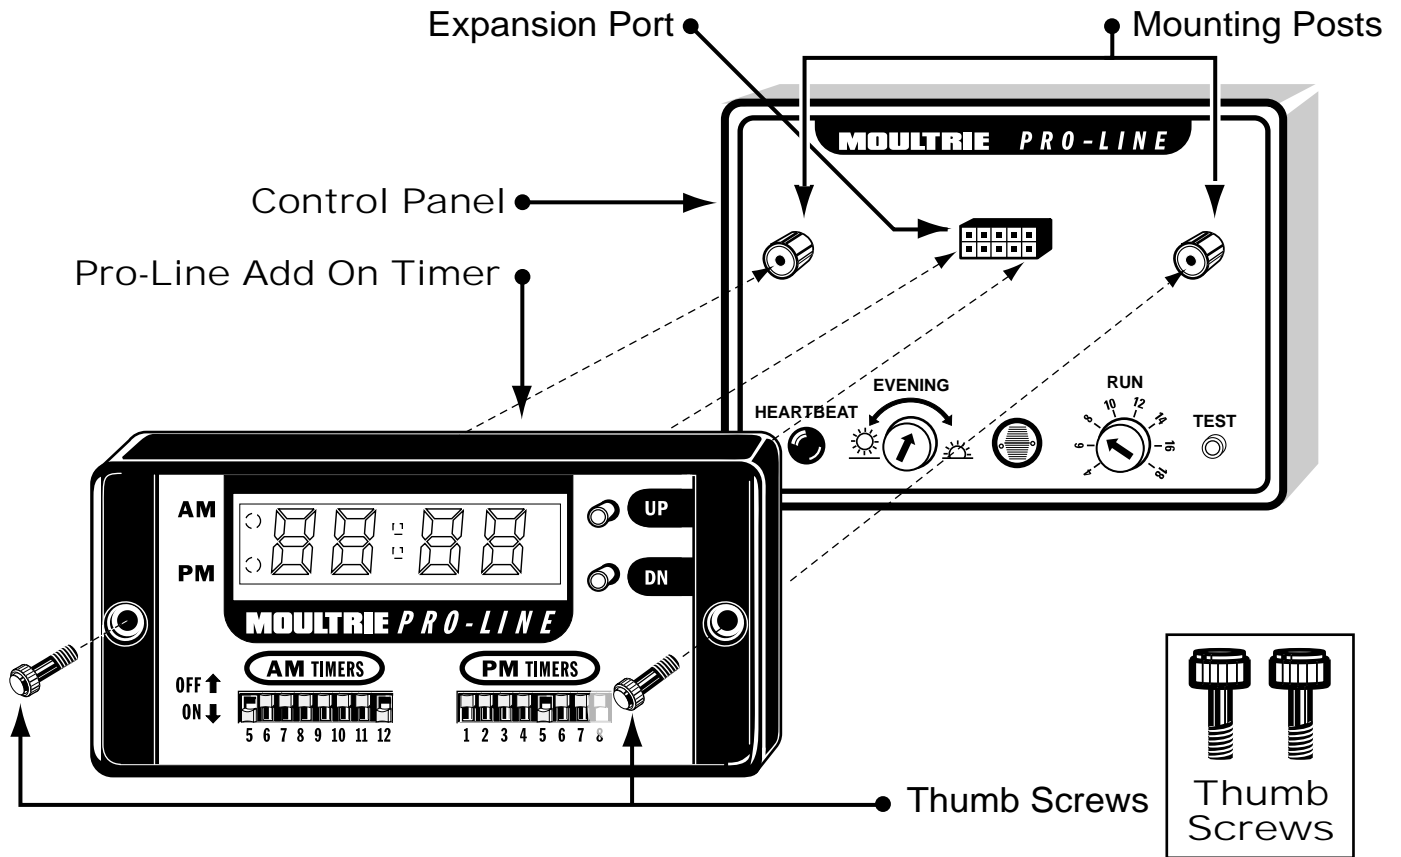


NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and the receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

II SET TIME OF DAY

To set the current time, press the UP or DN buttons on the right side of the Timer. Hold button down to advance quickly. Press button repeatedly to select a specific minute. The lights on left side of the display indicate AM or PM.

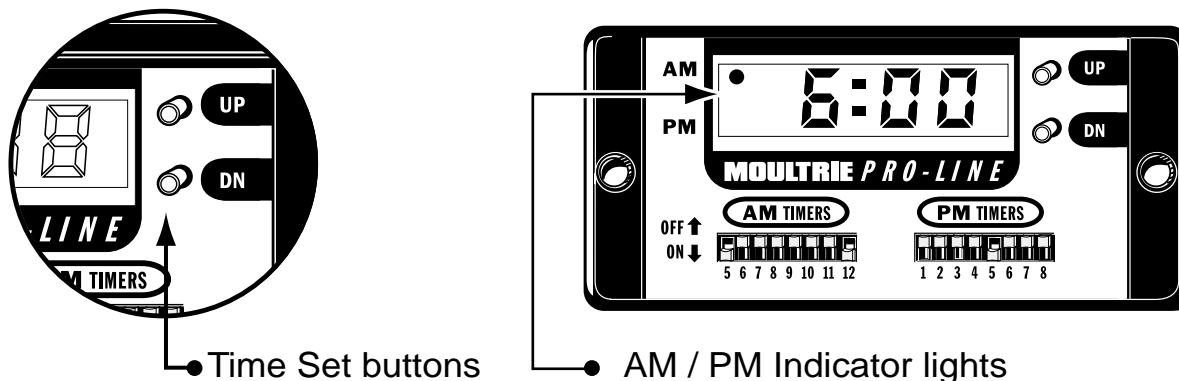

Your **Pro-Line Timer** is equipped with a power saving feature which turns off the display after 15 seconds of inactivity. The display does not need to be on in order for the feeder to operate normally. Press the UP or DOWN button to turn the display back on.


The time will be stored in memory unless one of the following occurs:

- The Battery is dead or disconnected for longer than 20 seconds
- The Pro-Line timer is removed from the control panel for 30 seconds

III SET FEED TIMES

The Pro-Line Add-On Timer allows you to feed up to 16 times per day between the hours of 5:00am and 8:00pm. To select the times to feed, slide the switch to the "ON" position that corresponds to the hour(s) desired. The feeder will then dispense feed at that time for the duration indicated by the Run Time setting on the face of the Control Panel.

The illustration to the right indicates that the Timer will feed at 5:00 am, 12:00pm (noon), and 5:00 pm respectively.

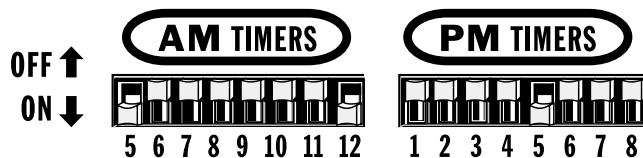

The evening feed control knob and the light sensor on the control panel will no longer activate the feeder after the Timer is installed. The **TEST** button may still be used for testing the feeder and the Run Time.

TIPS AND POINTERS

1: (Q) Will I have to reset the time every time I change the battery or if I have to disconnect it? (A) No. Your Pro-Line Add On Timer will hold enough of a charge to allow you 15 seconds of time to replace your battery without having to reset the time.

2: (Q) What should I do if the timer isn't working? (A) Check the connections to the battery to make sure alligator clips have not come loose. Then check the battery itself by changing to a known good battery. If the problem still persists, call Moultrie Customer Service at the number below.

MOULTRIE Our Service Department will gladly answer any questions you have.
PRO-LINE Call 205-664-6700 Monday – Friday, 8:00 AM to 5:00 PM CST.
 www.moultriefeeders.com