

HEAVY DUTY MACHINE SYSTEM



A magnetic device

SUPER600

Heavy duty electric punch machine

Punch thickness :5.0 mm

Punch width :600 mm

Working height:33" (840mm)

Punching margin is adjustable from 2mm to 6mm(not included special die) .

Punch speed:60times/minute

Power:AC110/240 V 60/50Hz Motor:1500W

Easy operation by foot switch . Comfortable operation .

24 hours continuous working

Exchangeable punching dies for all loose-leaf binding system .

Changing of dies is quick and easy .

Double wire closure is available by changing into closing die .

Dimension(mm): 1000×640×1110

Weight: 270kg



Put the screw in the red bracket then tight it connecting with the punching die




Take the punching die out by red bracket



Insert and assemble closing die and adjust the height of closure according to the wire to be closed .

Code	Pitch	Diame ter	Holes	Hole distance	Die Pattern Style
A	3:1	4×4mm (0.156×0.156)	72	8.47	
B	4:1	φ4.2mm (0.165)	96	6.35	
C	4:1	5.5×4.0mm (0.217×0.156)	96	6.35	
D	2:1	6.35×6.35mm (0.250×0.250)	48	12.7	
E	14.25mm	8×3mm (0.312×0.125)	43	14.25	
F	4:1	4.5×3.6mm (0.177×0.142)	96	6.35	
G	5:1	φ3.2mm (0.126)	119	5	
H	3:1	φ4mm (0.156)	72	8.47	
I	3:1	φ4.2mm (0.165)	70	8.47	
J	3:1	φ4.2mm (0.165)	72	8.47	
K	3:1	4×4mm (0.156×0.156)	70	8.47	
L	3:1	φ5mm (0.197×0.197)	72	8.47	
M	25mm		24	25	
N	45mm		14	45	
O	4:1	φ4×3mm (0.156×0.125)	96	6.35	
P	5:1	φ4×3mm (0.156×0.125)	119	5.08	
Q	2:1	5.5×5.5mm (0.217×0.217)	48	12.7	
R	2:1	φ5mm (0.197×0.197)	48	12.7	
S	6	φ4.2mm	102	6	
T	2:1	3.5×5.5mm	48	12.7	
U	2:1	φ6.4mm	48	12.7	
V	2:1	6×6mm	48	12.7	
W	3:1	φ4.5mm	72	8.47	
X	3:1	φ4.5mm	70	8.47	

PUNCH DIE PATTERNS

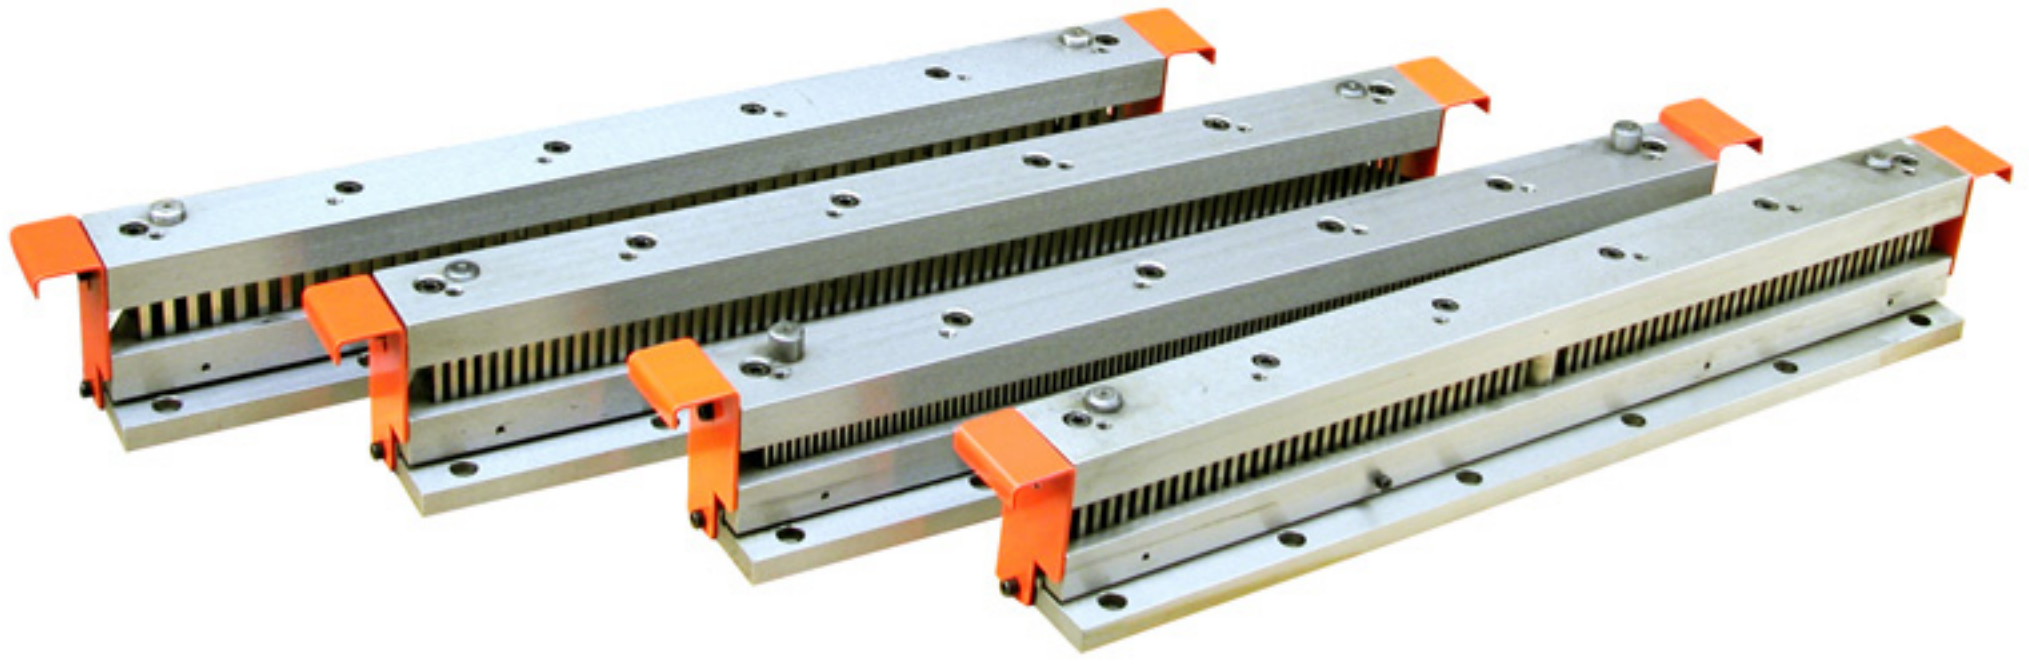

Additional special punching patterns are available!